



Model Number


V1-G-1,5M-PUR-H/S-T-V1-G

Y connecting cable, M12 to 2xM12, 3-pin, irradiated PUR cable

Features

- Simple assembling of 2 signals to one M12 plug-in station
- Flexible sheathing
- Immunity to vibration, with mechanical latching
- Knurled nut suitable for tool assembly
- Halogen-free

Dimensions

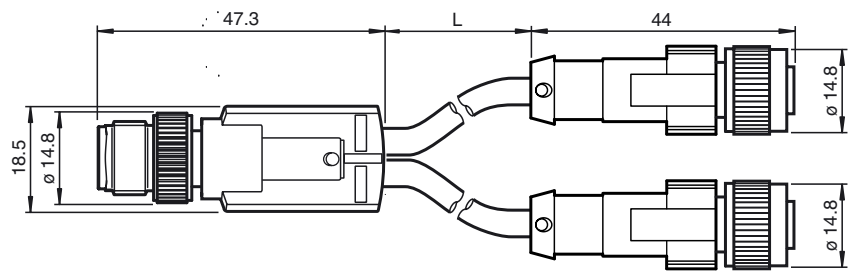

Technical data

General specifications

Number of pins	3
----------------	---

Electrical specifications

Operating voltage	U_B	250 V
Operating current		max. 4 A
Volume resistance		< 5 m Ω

Ambient conditions

Ambient temperature	-25 ... 90 °C (-13 ... 194 °F)
Pollution Degree	3

Mechanical specifications

Degree of protection	IP65 / IP68 / IP69K
Connection	1 x M12 connector, straight 2 x M12 straight sockets

Material

Contacts	CuSn
Contact surface	Ni/Au
Body	TPU, black
Cable	PUR, irradiated
Slotted nut	Zinc die-casting, nickel-plated
Sleeve connector	Zinc die-casting, nickel-plated

Cable

Color	orange	
Cores	3 x 0.34 mm ²	
Conductor construction	42 x 0.1 mm	
Length	L	1.5 m

Electrical connection

