

Model Number

OMH-SLCT-110-2500

Mounting base for floor mounting with rear panel and cover plate

Features

- Eight grooves for mounting photoelectric sensors or accessories, three on the inside and five on the outside
- Corner mounting of photoelectric sensors with a directional difference of 90°
- Cover prepared for indicator light mounting
- Rear panel prepared for 3 sensors and 6 cable glands

Accessories

OMH-SLCT-200

Floor mount

OMH-SLCT-120-2500

Side protection for mounting base

OMH-SLCT-10

Clamp mounting suitable for 6 mm ... 11.5 mm groove


OMH-SLCT-11

Reverse clamp mounting suitable for 8.5 mm ... 10.5 mm groove

OMH-SLCT-12-500

Mounting bracket, muting arm with round rod d=12 mm

Dimensions

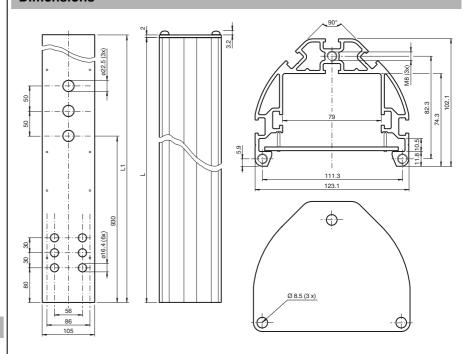

Technical data

General specifications

Setting angle \pm 5 ° with product OMH-SLCT-200 Tilting angle \pm 2.5 ° with product OMH-SLCT-200

Ambient conditions

Ambient temperature $-40 \dots 80 \,^{\circ}\text{C} \, (-40 \dots 176 \,^{\circ}\text{F})$ Storage temperature $-40 \dots 80 \,^{\circ}\text{C} \, (-40 \dots 176 \,^{\circ}\text{F})$ Relative humidity $80 \,^{\circ}\text{C} \, ,$ noncondensing

Mechanical specifications

Housing length L 2480 mm

Material

Housing anodized aluminum,

Housing anodized aluminum , Steel Mass approx. 14.8 kg


General information

Scope of delivery Mounting base, back plane, cover plate
The three fillister head screws for the cover plate are supplied

with the floor mount

www.pepperl-fuchs.com

Mechanical arrangement

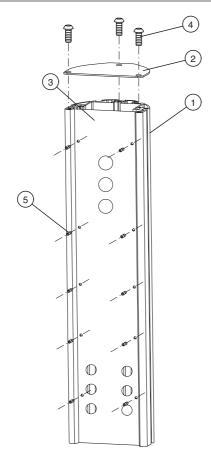

1	Mounting base	2	Cover plate	3	Back plane
4	Rounded head screw M8 x 20	5	Headless screw M4 x 16		