



ECOLAB

Model number


VAZ-T1-FK-G10-2M-PUR-V1-GV4A

G10 junction block, AS-Interface to 1x M12 round plug connector with stainless steel cap nut


Features

- One piece housing
- Simple and fast mounting
- Stainless steel version, especially suitable for applications in the food industry
- Gold-plated and machined contacts
- Oil and abrasion resistant PUR line appropriate for drag chains
- Immunity to vibration
- Degree of protection IP68 / IP69K
- Halogen-free

Dimensions

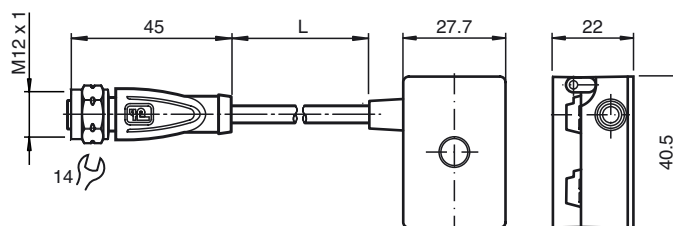

Electrical connection

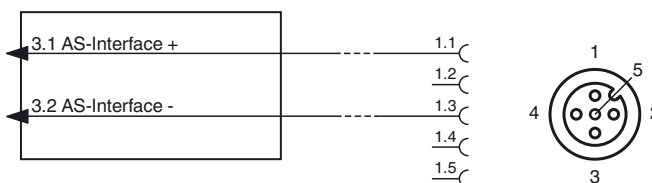

Technical data

General specifications

Construction type	Socket, straight Flat cable terminal AS-Interface
UL File Number	E223772 "For use in NFPA 79 Applications only"

Electrical specifications

Rated operating voltage	U_e	$\leq 32 \text{ V PELV (AS-Interface)}$
Rated operating current	I_e	$\leq 4 \text{ A}$
Protection class		III
Surge protection		overvoltage category III

Ambient conditions

Ambient temperature	$-25 \dots 75 \text{ }^\circ\text{C} (-13 \dots 167 \text{ }^\circ\text{F})$
Storage temperature	$-25 \dots 85 \text{ }^\circ\text{C} (-13 \dots 185 \text{ }^\circ\text{F})$
Pollution degree	3

Mechanical specifications

Degree of protection	IP67 IP67 / IP68 / IP69K with flat cable VAZ-FK-S*
Connection	Flat cable AS-Interface: cable piercing method Plug connection: M12 x 1 socket (V1)

Material

Contacts	CuSn / Au
Housing	PBT PC
Body	black PUR
Cable	PUR
Slotted nut	stainless steel 1.4404 / AISI 316L
Mounting screw	Stainless steel 1.4305 / AISI 303

Cable

Sheath diameter	Ø4,3 mm
Color	black
Cores	2 x 0.5 mm ²
Length	L 2 m
Mass	75 g
Tightening torque, fastening screws	1.65 Nm
Note	The unused flat cable connector is closed with a seal.

Compliance with standards and directives

Standard conformity	
Degree of protection	EN 60529:2000

Approvals and certificates

UL approval	cULus Listed, Type 1 enclosure
-------------	--------------------------------

Maximum permissible operating current $\leq 3\text{ A}$

Maximum permissible ambient temperature $\leq 55\text{ °C}$ ($\leq 131\text{ °F}$)

Notes

Mounting instructions

You may screw the device onto a level mounting surface using two M4 attachment screws. The attachment screws are not included.

